

Insertion Electromagnetic Flow meter **GT300-INT**



Features:

- *No moving parts,
Virtually no pressure loss.*
- *Various measuring pipe
from 100mm to 6000mm.*
- *Corrosion protection,
abrasion resistant.*
- *High level of anti-vibration
and anti-jamming, wide
measuring dimensions.*
- *Multi-output interface: 4~20mA,
Pulse, Alarm outputs,*
- *RS-485 and Modbus communication.
GPRS*

It can measure the flow at every position at high precision.



Greentech K0rea Co., Ltd.

Index

| | |
|---|---|
| 1. Introduction | 1 |
| 2. Features | 1 |
| 3. Structure and Operation Principle | 2 |
| 4. Product Structure | 2 |
| 5. Technical Specification Table | 3 |
| 6. Technical Parameters | 4 |
| 7. Flow Ranges | 4 |
| 8. Drawing Insertion Magnetic Flow | 5 |
| 9. Specifications of Transmitting Signal Converters | 6 |
| 1. High performance Version: S200 | 6 |
| 2. Remote Version: RT400 | 6 |
| 3. Battery type | 7 |
| 11. Ordering Code | 8 |
| 1. Selection codes of Flow meter | 8 |
| 2. Selection codes of Transmitting Signal Converter | 8 |



Introduction

The product consists of insertion electromagnetic flow sensor (referred to as sensors) and insertion electromagnetic flow converter (referred to as converter) supporting components, used to measure the volume flow of various conductive liquids in the pipe.



Features

- Internal rotation sensors have no moving parts, compact size, simple structure, reliable work.
- The inserted installation configuration, it can be easily installed and removed under low pressure or under-pressure without water supply, it is ideal instrument for users to upgrade the existing pipeline, which is easy and convenient for flow meter installation and maintenance.
- Measurement accuracy is not influenced by measured medium temperature, pressure, density, viscosity, conductivity influence (as long as the conductivity is bigger than 20us/cm) and other physical parameters change.
- Sensors almost have no pressure loss, low energy consumption
- Manufacturing costs and installation costs lower than the average pipe flow meter.
- Particularly suitable for large and medium pipeline measuring and enjoy high-cost performance.
- Zero stability, strong anti-interference ability, reliable work.
- Flow measurement big range. Full scale flow is measured within the pipe can set from 1m/s to 10m/s, the output signal is linear with flow.
- Flow meter not only has 0~0mA / 4~20mA standard current output, as well as frequency output and various of communication interfaces, such as RS485/ HART so on.

Due to the above advantages of insertion electromagnetic flow meter, which has been widely used in chemical, iron and steel, metallurgy, fertilizer, paper, industry, irrigation, water supply and drainage, sewage and other industrial sectors.



Structure and Operation Principle

Structure

The electromagnetic flow meters are made up of sensor and transducer, together with LCD screen, current and pulse output, alarm signal and RS-485 communication.

Operating Principle

Faraday's Laws of Induction form the basis for the electromagnetic flow meters. It states that a voltage is induced in a conductor as it moves through a magnetic field.

This principle is applied to a conductive fluid which flows through a magnetic field generated perpendicular to the flow direction (see Schematic).

The voltage induced in the fluid is measured at two electrodes, installed diametrically opposed.

This signal voltage U_E is proportional to the magnetic induction B , the electrode spacing D and the average flow velocity v . Noting that the magnetic induction B and the electrode spacing D are constants, proportionality exists between the signal voltage U_E and the average flow velocity v .

The equation for the volume flow shows that the signal voltage U_E is linear and proportional to the volume flow rate.

The induced signal voltage is processed in the converter into scaled, analog and digital signals.

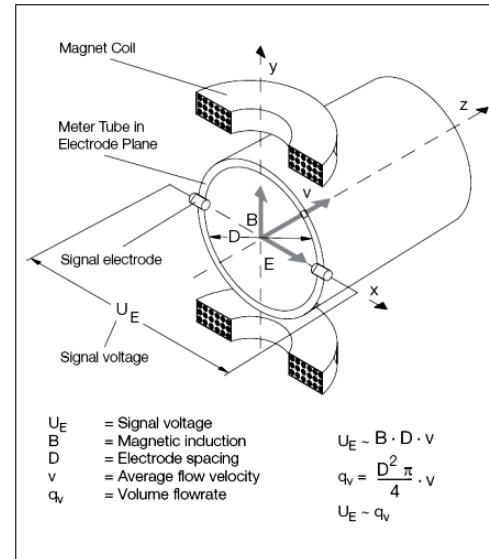


Fig. 1: Electromagnetic Flow meter Schematic

Product Structure

- **The measuring head:** Probe (measuring tube) use to test the measuring point flow rate. The probe (or the measuring tube) is made of an insulating material or conduit ends, with a pair of electrodes. Apart from the electrode terminal and the inner wall of the measuring tube, the other part is insulation condition with the measuring liquid.
- **Excitation system:** the role of the excitation system is to produce a operating magnetic field, which is consists of an excitation coil and a iron core, which is insulated sealed within the probe.
- **Plug-in rod:** It was made of stainless steel, the measuring head is fixed on the plug-in rod.
- **Terminal box:** It is located on the upper part of flow sensor, the wiring terminal inside the terminal box plays the role of connection of flow sensor and converter.
- **Installation base:** It is welded on the measuring pipeline, it is used for connecting the installation ball valve and the plug-in flow sensor part.
- **Sealing component:** It consist of compression screw seat, glad nut, rubber washer and positioning screw made of stainless less, which used for sealing while plug-in, and help it resist certain working pressure.

Technical Specification Table

| | | |
|---|---|--|
| GT300-INT Electromagnetic Flow meter |  |  |
| | Integral type | Remote separate type |
| Accuracy | $\pm 1.5\sim 2\%$ of reading value (Standard version) | |
| Min. Conductivity | 20 Micro Simens | |
| Measuring range | 0.5~10m/sec | |
| Flow direction | Bi-direction | |
| Diameter (mm) | M: DN100~900mm, L: DN1000-6000mm. | |
| Medium Pressure | DN100~250mm: 1.6 MPa DN300~1000mm: 1.0 MPa DN1200~2000mm: 0.6 MPa | |
| Medium Temperature | 0~80°C | 0~120°C (Option) |
| Process connection | Thread ball valve: DN50, Flange ball valve: DN50 | |
| Material | Sensor pipe | SUS304, SUS316L, Option: Others |
| | Electrode | SUS316L, Titanium, Tantalum, Hastelloy B, Hastelloy C, Stainless steel covered with tungsten carbide, Platinum-Iridium |
| | Electrode cap | ABS, PTFE. |
| | Valve | SUS304, SUS316, Others. |
| Meter Protection Level | IP65, IP67, IP68 | |
| Ambient Temperature | -20~60°C | |
| Influence of Ambient Temperature | $< \pm 0.1\% / 10^\circ\text{C}$ or $< \pm 0.25\% / 10^\circ\text{C}$ | |
| Repetition | $\leq \pm 1.5\%$ | |
| Measurement Range of Velocity | $\leq 12\text{m/s}$ | |
| Transmitting Signal Converter | Power: 85~240VAC, 50~60hz.(Option: DC 20~36V) Output: Standard output (4~20mA) Dual current output, Option: RS485, HART, Proflbus-PA Analog output error: $\leq \pm 0.02\text{mA}$ | |
| | Display: LCD-Flow rate (4-digits), Totalizer (9-digits), Velocity, Alarm status Rate: selectable of m3/h, L/sec, US Gal/min, user's Volume: m3, liter, US Gal, user's Positive, Total, Negative and Auxiliary (clearable, daily) volume | |
| | Control: Key board. | |
| | Time constant: programmable from 1 to 20sec. | |
| | Mounting: integral or separate | |
| | Power consumption: below 150VA | |
| | Enclosure: weather proof IP65 | |
| | Electric Connections M20x1.5 , 1/2" NPT (With Adapter) | |



Technical Parameters

- Nominal diameter: DN 100~2000mm
- Working pressure: $\leq 1.6 \text{ MPa}$
- Flow rate measuring range: 0~1m/s to 0~10m/s, full scale within 1~10m/s range continuously adjustable.
- Measurement accuracy: flow rate $> 0.5 \text{ m/s}$, $\pm 1.5\text{--}2\%$ of rate.
- Measured medium conductivity: $\geq 20 \mu\text{s/cm}$
- Measuring tube (head) material: ABS
- Measuring pipe material: SUS304, SUS316
- Electrode material: SUS316L, Hastelloy C, Tantalum,
- Ambient temperature: $-10 \text{ }^{\circ}\text{C} \text{--} +55 \text{ }^{\circ}\text{C}$
- Shell protection degree: IP65, IP67, IP68
- DC current: $\sim 10 \text{ mA}$ load resistance is $0 \text{--} 1 \text{ k}\Omega$
- 4~20mA load resistance is $0 \text{--} 500 \Omega$
- Frequency: $1 \text{--} 5 \text{ kHz}$ load resistance is $250 \Omega \text{--} 1.2 \text{ k}\Omega$
- Communication interface: RS232/ RS485, HART
- Converter power supply type: 85~220VAC, 24VDC, 3.6V battery powered
- Connection method: Flanged, Threaded connection

Flow Ranges

| DN (mm) (Inch) | | Velocity (m/sec) | | | | | |
|-------------------|------|------------------|---------|---------|----------|----------|---------|
| | | 0.5 | 1.0 | 1.5 | 2.0 | 2.5 | 3.0 |
| 300 | 12 " | 127.2 | 254.4 | 381.6 | 508.8 | 636.0 | 763.2 |
| 350 | 14 " | 173.1 | 346.2 | 519.3 | 692.4 | 865.5 | 1,038.6 |
| 400 | 16 " | 226.1 | 452.2 | 678.3 | 904.4 | 1,130.5 | 1,356.6 |
| 450 | 18 " | 286.2 | 572.3 | 858.3 | 1,144.6 | 1,430.8 | 2,574.9 |
| 500 | 20 " | 353.3 | 706.5 | 1,059.8 | 1,413.2 | 1,766.5 | 2,119.8 |
| 600 | 24 " | 508.7 | 1,017.0 | 1,526.0 | 2,034.0 | 2,544.0 | 3,052.0 |
| 700 | 28 " | 682.4 | 1,385.0 | 2,047.0 | 2,730.0 | 3,412.0 | 4,094.0 |
| 800 | 32 " | 904.3 | 1,808.0 | 2,713.0 | 3,617.0 | 4,522.0 | 5,126.0 |
| 900 | 36 " | 1,145.0 | 2,290.0 | 3,435.0 | 4,580.0 | 5,725.0 | 6,870.0 |
| 1000 | 40 " | 1,413.0 | 2,826.0 | 4,239.0 | 5,652.0 | 7,065.0 | 8,478.0 |
| 1200 | 48 " | 2,034.0 | 4,068.0 | 6,102.0 | 8,136.0 | 10,170.0 | |
| 1400 | 56 " | 2,770.0 | 5,540.0 | 8,310.0 | 11,080.0 | 13,850.0 | |

Drawing Insertion Magnetic Flow
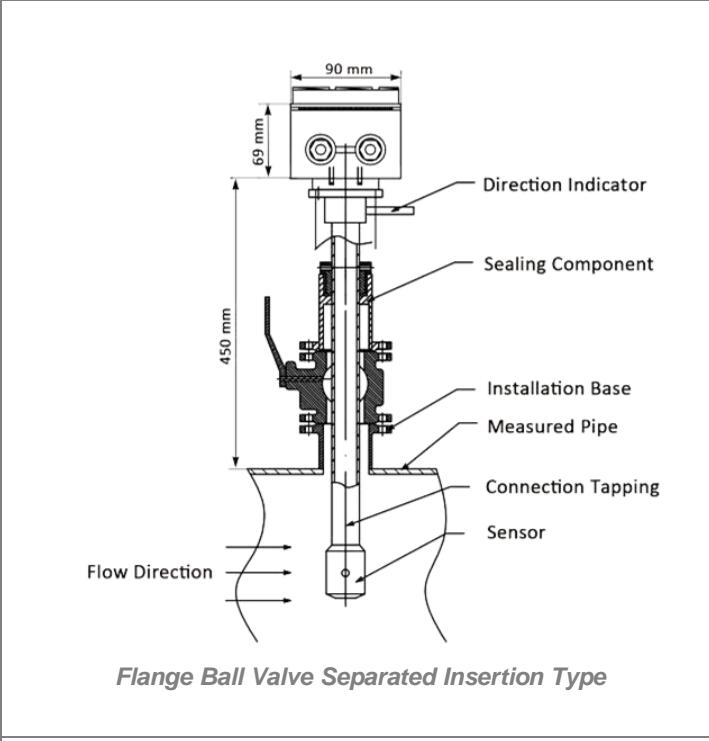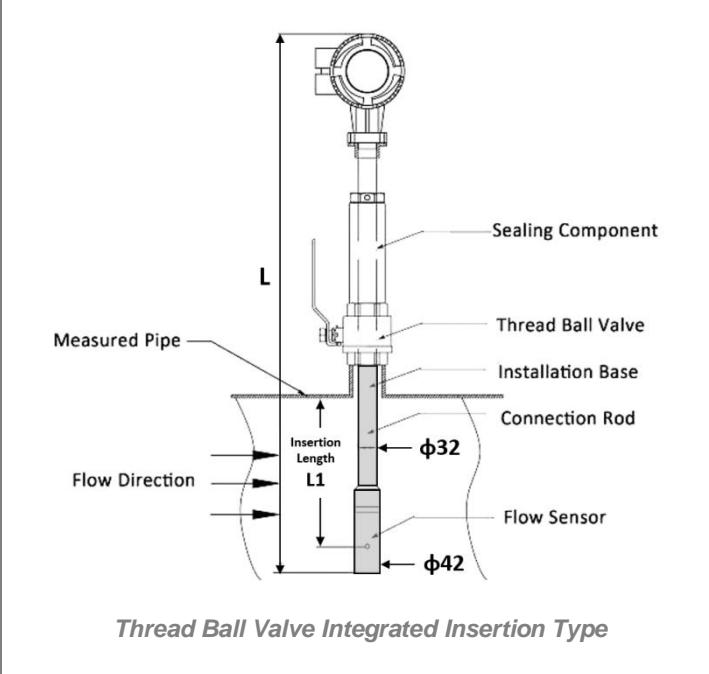
| | |
|---|---|
|  <p><i>Flange Ball Valve Separated Insertion Type</i></p> | <p>Remarks:</p> <p>Measuring Tube/Sensor: It's used to measure the velocity of medium, two electrodes are installed in it.</p> <p>Exciting System: It can produce magnetic field, it is composed by exciting coils and iron core, it is sealed in the measuring tube.</p> <p>Connection Rod: Measuring tube is fixed in it.</p> <p>Installation Base: It will be welded in the measuring pipe.</p> <p>Seal Component: Consists of screw seat, nut, rubber washer and dog screw.</p> |
|  <p><i>Thread Ball Valve Integrated Insertion Type</i></p> | |

| Specification | | |
|---------------|------------|---------------------|
| Pipe size | Length (L) | Insertion Length L1 |
| 100≤DN≤250 | 758mm | 1/2 DN |
| 600≥DN≥300 | 958mm | |
| 1000≥DN≥700 | 1158mm | 1/3~1/2DN |
| 2000≥DN>1200 | 1458mm | 1/4~1/2DN |

Specifications of Transmitting Signal Converters

1. High performance version: **S400**




(S) Single housing



(D) Double housing


- Matched Size: DN100~6000mm
- Power Supply: 85~240VAC, 20~36VDC
- Accuracy: 0.5% of rate (Span: 0.5~10m/s), 0.5%FS (Span: 0~0.5m/s)
- Exciting current: 200mA and 100mA optional
- Menu Language: English
- Display: Forward and Reverse Flow rate, Total flow, Velocity
- Alarm Function: Empty Pipe Alarm, System Alarm
- Signal Output: Pulse, Frequency, 4-20mA (4 wire or 2 wire)
- Communication: Modbus
- Option: HART, Profibus.
- Power consumption: Less than 20W
- Option: Data logger, Total flow: Daily, Monthly, Yearly.

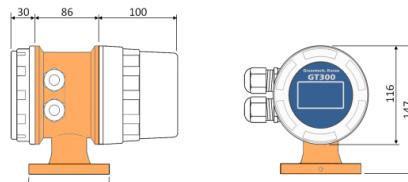

2. Remote version: **RT400**



- Matched Size: DN100~6000mm
- Power Supply: 85~240VAC, 20~36VDC
- Accuracy: 0.5% of rate (Span: 0.5~10m/s), 0.5%FS (Span: 0~0.5m/s)
- Exciting current: 187mA
- Menu Language: English
- Display: Forward and Reverse Flow rate, Total flow, Velocity
- Alarm Function: Empty Pipe Alarm, System Alarm
- Signal Output: Pulse, Frequency, 4-20mA (4 wire or 2 wire)
- Communication: Modbus, HART, Profibus
- Option: Data logger, Total flow: Daily, Monthly, Yearly.

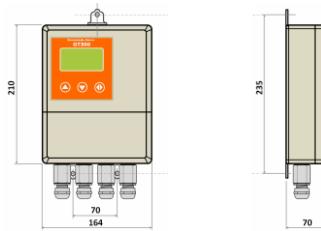

3. Battery type Signal Converter:

A) Battery type: **BT800**



- Matched Size: DN100~6000mm
- Power Supply: **Battery Supply**
- Accuracy: 0.5% of rate (Span: 0.5~10m/s), 0.5%FS (Span: 0~0.5m/s)
- Battery Life time: 5 years
- Display: **Forward and Reverse Flow rate, Total flow, Velocity**
- Alarm Function: **Empty Pipe Alarm, Battery Volume Alarm**
- Signal Output: **RS485 only for calibrating**

B) Battery type with GPRS/CDMA communication function: **BT803**



- Matched Size: DN100~6000mm
- Power Supply: **Battery Supply**
- Accuracy: 0.5% of rate (Span: 0.5~10m/s), 0.5%FS (Span: 0~0.5m/s)
- Battery Life time: 5 years
- Display: **Forward and Reverse Flow rate, Total flow, Velocity**
- Alarm Function: **Empty Pipe Alarm, Battery Volume Alarm**
- Signal Output: **RS485 only for calibrating**
- Communication: **No Communication**
- **GPRS communication or others optionally.**



Ordering Code

1. Selection codes of Flow meter

| Code: GT300-INT - □ - □ - □ - □ - □ - □ - □ - □ - □ | | | Description |
|---|-------------|----------|--|
| Pipe size | M | | DN100~900mm |
| | L | | DN1000~6000mm |
| Calibrated meter size | XX | | () mm |
| Electrode material | L | | SUS316L |
| | TI | | Titanium |
| | TA | | Tantalum |
| | HB | | Hastelloy B |
| | HC | | Hastelloy C |
| | TG | | Stainless steel covered with tungsten carbide |
| | PT | | Platinum-Iridium |
| Electrode cap material | S | | ABS, Standard |
| | O | | Others |
| Pipe material | C | | Carbon steel |
| | S() | | Stainless steel Flange (04): SUS304, (16): SUS316 |
| Valve material | S() | | (04): SUS304, (16): SUS316, (16L): SUS316L, O: Others. |
| Process connection | T | | Thread connection: 2" NPT |
| | Flange | S | DN50 PN16 |
| | | O | OTHERS |
| Liquid temperature | L | | <80°C |
| | H | | <120°C (Remote type) |
| Flow sensor protection Class | A | | IP65 |
| | B | | IP67 |
| | C | | IP68 |

2. Selection codes of Transmitting Signal Converter

| | | | |
|-----------------------|-----------------------|-----------|---|
| Signal converter type | S400 | S | Single head type-General application |
| | | D | Double head type-General application |
| | R400 | | Remote surface mounting (0.5% of reading value) |
| | BT800 | | Battery type (0.5% of reading value) Direct mounting, RS485 |
| | BT803 | | Battery type (0.5% of reading value) Direct mounting, RS485 & GPRS. CDMA |
| | Mounting Construction | -I | Integral direct mounting |

| | | |
|------------------------|-----------|---|
| | -R | Remote mounting: Surface mounting |
| Enclosure | A | IP65 |
| | C | IP68 (BT803, BT803 converter) |
| Power supply | A | 85~240VAC |
| | B | 20~36VDC |
| | C | Lithium battery (RS485 output only for calibration) |
| Standard output signal | -S | 4-20mA Current output Pulse output, Frequency output, RS485 MODBUS |
| Communication | -N | No communication |
| | -B | RS485 (Modbus)-Battery supply type |
| | -F | Profibus; Only option for S400 Signal Converter |
| | -H | HART: Only option for S400 Signal Converter |
| | -G | GPRS |
| Cables length | -0 | No cable (Integral type) |
| | -1 | XX meters.(Remote type) |

Note 1: Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the instrument itself can be damaged and that fragments from the instrument can contaminate the user's process fluids. Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact GT300 for detailed information of the wetted parts material.

Note 2: Our technical specification may be updated or changed without any prior notice.

Note 3: The color may be changed by our condition.

The our technical specifications may be revised for update without prior notice